

2580

Hydraulic Powered Installation Tool

Specifications

Weight:

3 kg (6.58 lbs.)

Stroke:

24 mm (0.94 in.)

Operating Hydraulic Pressures:

Pull- *510 bar (*7,400 psi)

Return-221 bar (3,200 psi)

* For fastener diameter 9.5 mm (3/8") and above


Capacity:

36,65 kN @ 393 bar

(8240 lbs @ 5700 psi)

47,6 kN @ 510 bar

(10700 lbs @ 7400 psi)

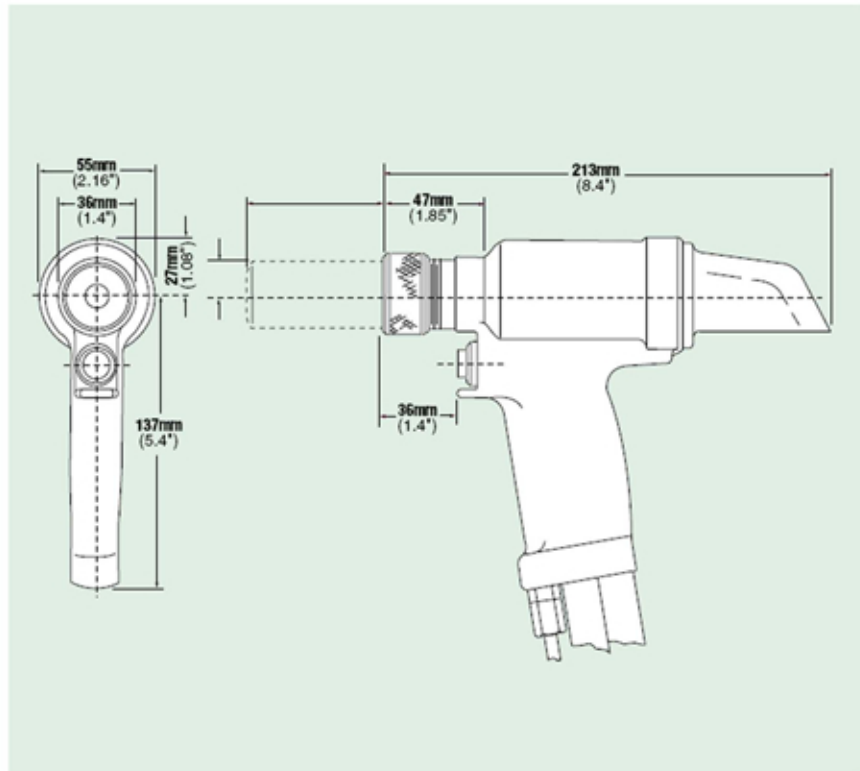

Nose assemblies are to be ordered separately

Compatible Fastener

Type	Diameter	Nose Assembly
BOM	4.8 mm (3/16")	99-1053
	6.4 mm (1/4")	99-830-1
	7.9 mm (5/16")	99-769
	9.5 mm (3/8")	99-1272
MAGNA-LOK	9.5 mm (3/8")	99-3318
MAGNA-BULB	7.9 mm (5/16")	99-3307
C6L/C120L	4.8 mm (3/16")	99-2558
	6.4 mm (1/4")	99-2564
	7.9 mm (5/16")	99-99-245
	9.5 mm (3/8")	99-100-245, 99-100-102
MAGNA-GRIP	4.8 mm (3/16")	99-3206
	6.4 mm (1/4")	99-3207
	7.9 mm (5/16")	99-1439
	9.5 mm (3/8")	99-1440
HUCKTAINER	9.5 mm (3/8")	99-3438



The 2580 is a lightweight tool for use in a wide range of high-speed production applications. With only one moving part, the tool provides for increased reliability and requires minimal maintenance.