
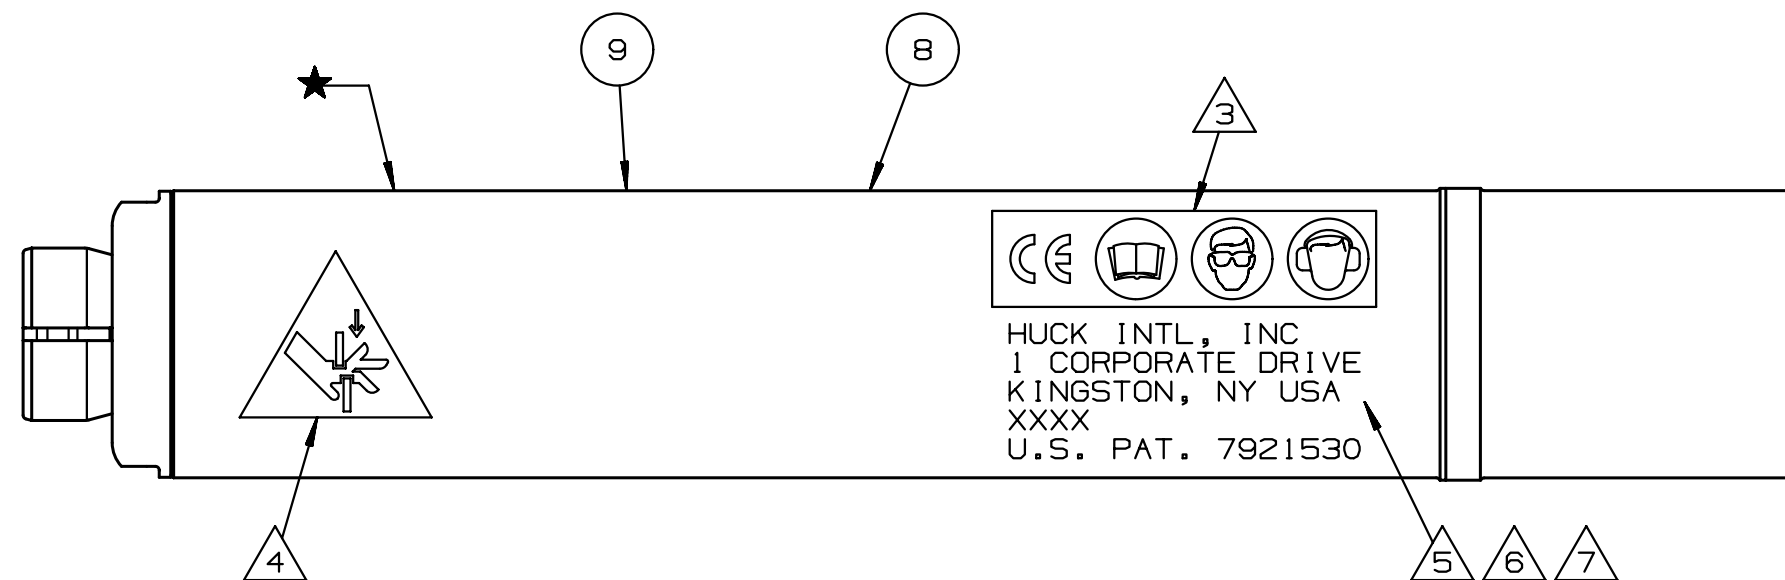


NOTES:

- ① APPLY ANTI-SEIZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL.
- ② APPLY LOCTITE 242 P/N: 505316 TO THESE THREADED JOINTS PER MFR'S INSTRUCTIONS DURING ASSEMBLY ON TOOL.
- ③ ETCH CE GRAPHIC APPROXIMATELY AS SHOWN
- ④ ETCH HAND CRUSH GRAPHIC APPROXIMATELY AS SHOWN
- ⑤ ETCH ADDRESS AS APPROXIMATELY AS SHOWN
- ⑥ ETCH YEAR OF MANUFACTURE DIRECTLY BELOW ADDRESS AS SHOWN
- ⑦ ETCH U.S. PATENT NUMBER AS SHOWN

ⓑ

REV	DESCRIPTION	DET	DATE
A	RELEASE	MJK	08/09/14
B	REMOVED NOTE 8	SMA	01/14/15

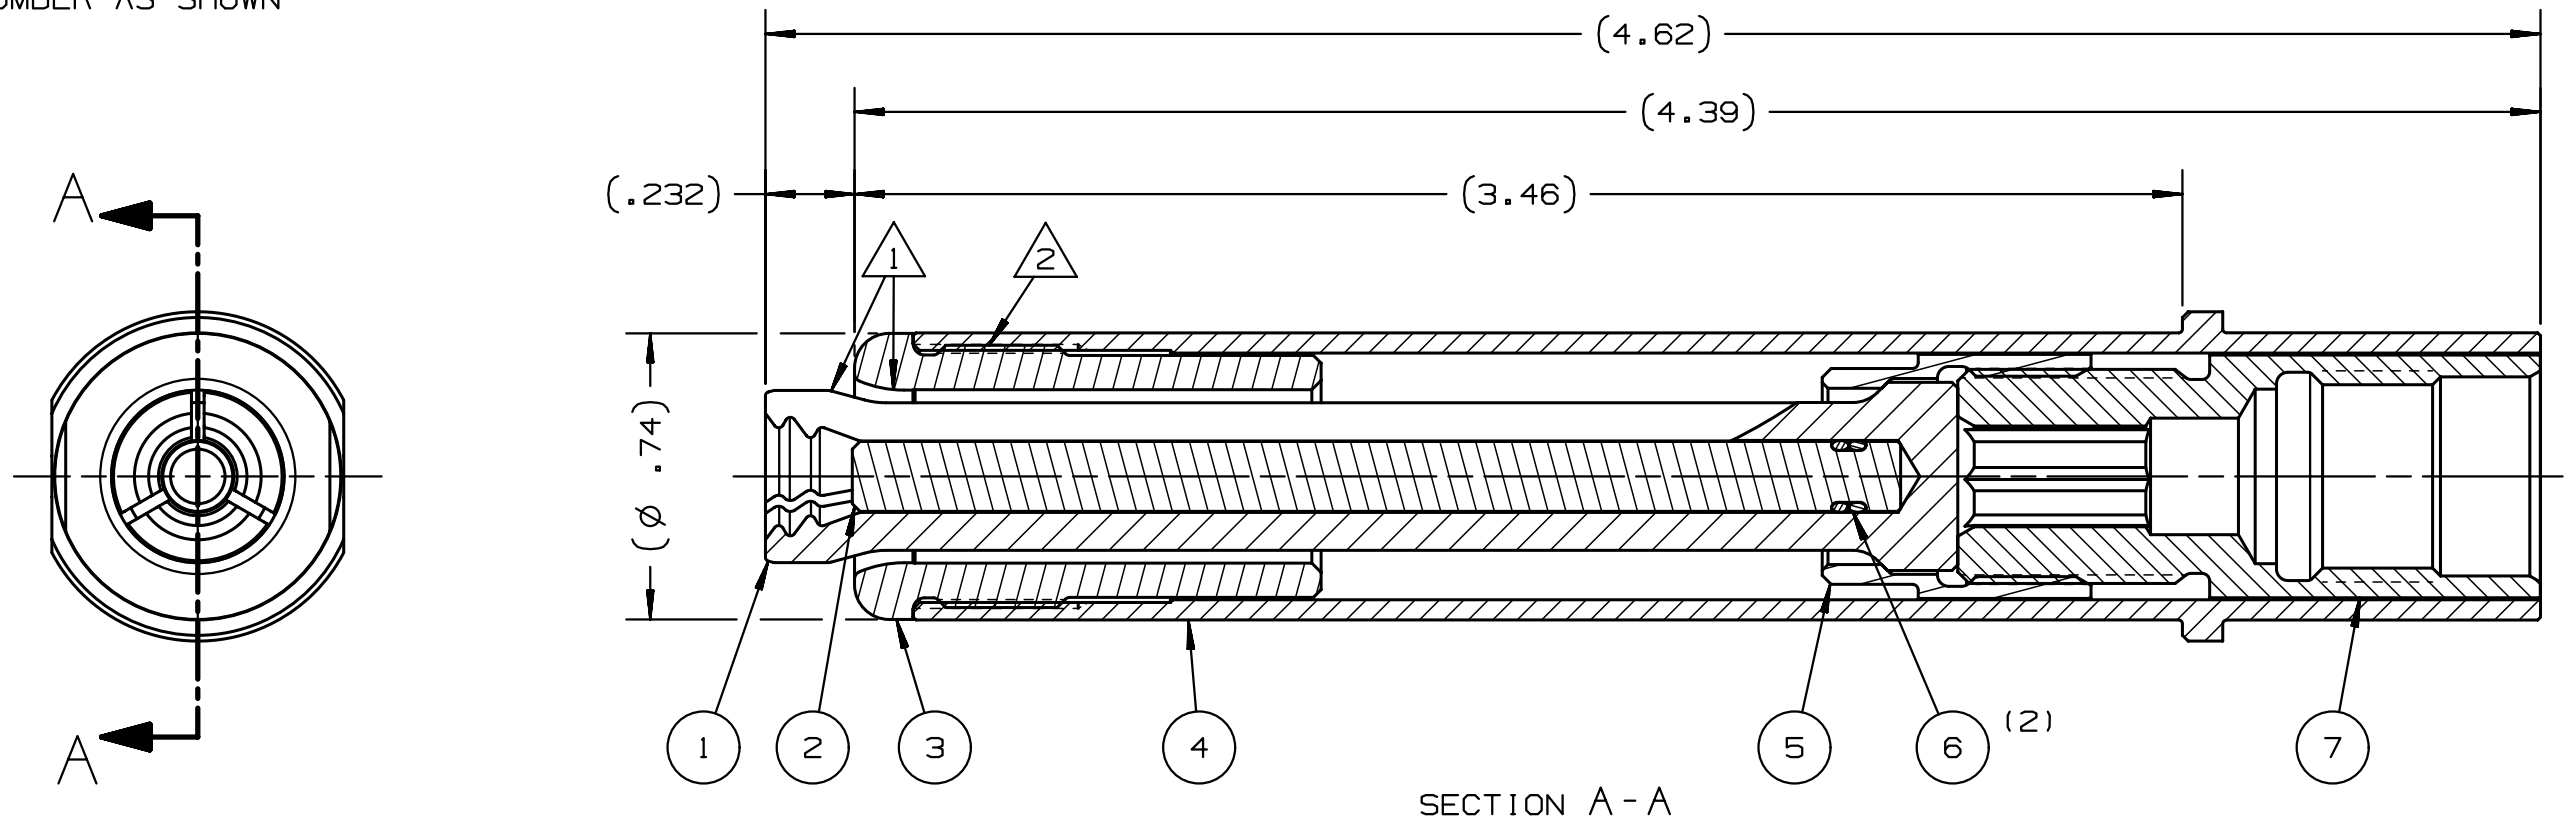

PART NO.	QTY	DESCRIPTION	ITEM
590513	1	PINCH POINT STICKER	9
590273	1	STICKER-WARNING	8
124360	1	EXTENSION, SPINDLE, 352T	7
508818	2	O-RING .12 ID X .031 CS	6
130711	1	PULLER CAP -10 BT	5
130713	1	HOLDER, ANVIL	4
130709	1	ANVIL, 244BT, -10 BT	3
130253	1	LIMIT ROD, PULLER, -10 BT	2
130710	1	PULLER, 244BT, -10 BT	1

IDENTIFICATION PER SPEC 42-311: ★ ETCH		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE, -10 BT (5/16") 244BT TOOL	
SCH B#: 8467.99.0190		FINAL ASSY: 244BT	
ENG: SMA	CK:	DATE: 8/09/14	SCALE: 2:1
HTS: 8467.99.0190		<b>B</b> <b>99-7933</b>	