


Heavy-Duty Fastening for Agriculture

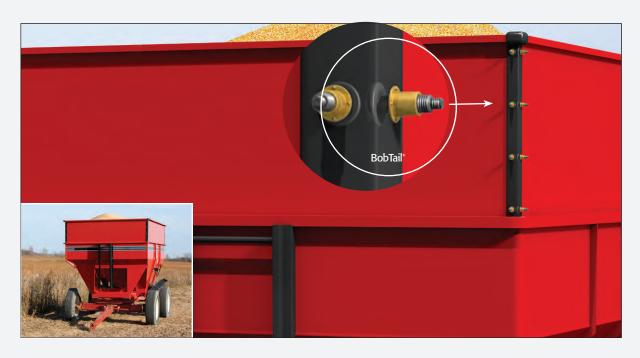

High strength, fast and easy installation, along with unmatched vibration-resistance, are what make HuckBolts® the smart choice for heavy equipment assembly applications for agriculture.

High Clamp Allows Welding Replacement and Lighter Equipment

In many applications, HuckBolts have been proven superior to all other forms of assembly for speed and accuracy of installation, safety, environmental friendliness, and overall productivity.

HuckBolts can also contribute to lightweighting of equipment by allowing aluminum to be used instead of steel. While replacing steel with aluminum is an excellent strategy for lightweighting, the problems associated with welding aluminum have often precluded its use. However, the strong clamp performance of HuckBolts provides the joining power to attach aluminum elements without welding. Because Huck* fasteners offer higher clamp than conventional fasteners, fewer or smaller diameter Huck fasteners can be used, further reducing weight. And HuckBolts deliver shear and tensile strength exceeding that of conventional nut and bolt fasteners.

These engineered fasteners are installed using a unique direct-tension/swaged-on method, providing for a smooth, jolt-free installation. The potential for repetitive stress syndrome, often experienced with torque wrench installations, is virtually eliminated. In addition, as compared to welding, using Huck fasteners does not require highly trained installation personnel, and provides for fast, safe, and accurate assembly.

High-Performance in the Field

Whether operating in the field or accommodating heavy storage capacities, agricultural machinery really takes a beating. The vibration-resistant, high-strength features of HuckBolts are ideal for tractors, harvesters, and towed equipment such as grain carts, ploughs, planters, balers, tillers, and rotary cutters. Typical applications for Huck® fasteners are found in the chassis, cab frame, seats, maintenance access panels, and wheel nuts. Huck fasteners can also be utilized in both mobile and permanent storage structures like grain silos.




Huck® Fasteners For Agriculture

HuckBolts[®]

Huck 360⁶

The Huck 360® nut and bolt system is designed for applications where the joining performance of a HuckBolt® is required, but removability and/or standard tooling are also requirements. The only Huck fastener requiring torque for installation, this breakthrough system delivers 5 times the fatigue life of a standard threaded bolt. The Huck 360 can be installed and removed 300% faster than conventional locknuts, adding to the efficiency and productivity of a wide range of assembly operations.



10mm, 12mm, 14mm, 16mm, 20mm, 24mm, 36mm



Engineered to meet the challenges of a wide range of heavy equipment assembly applications, Huck[®] BobTail[®] offers high performance, vibration resistance, and reliability in a unique, pintail-less design.

Available Sizes: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1",

12mm, 14mm, 16mm, 20mm

Materials: Steel, Aluminum, Stainless Steel
Headstyles: Round, Truss, 90° Flush, Flanged, 98T

U-Spin[®]

U-Spin® HuckBolts help speed up production with a simple, virtually foolproof installation process that's fast and precise. In fact, U-Spin can be installed in 45-60 seconds – roughly half the time it takes to install conventional U-bolts.

Available Sizes: Sized to customer requirements

Materials: Steel

Advanced Huck Tooling

Huck offers a full line of advanced, pneudraulic and heavy-duty hydraulic installation tools and nose assemblies that work with each engineered fastener. Supporting Huck hydraulic tooling is Huck's line of Powerig® power units.















Huck® Structural Blind Fasteners

BOM⁶

The Huck BOM® (Blind, Oversized Mechanically locked) fastener is so strong, one can do the work of up to four conventional fasteners. Its unique push-and-pull installation design makes it ideal for heavy equipment assembly use.

Available Sizes: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"

Materials: Steel, Stainless Steel

Other Structural Blind Fasteners

When only one side of the joint material is accessible, performance-engineered Huck structural blind fasteners are the smart choice. Each Huck blind fastener offers unique features that make it ideal for certain applications. Offering the industry's best range of shear and tensile strength, Huck structural blind fasteners include HuckLok®, Magna-Bulb®, and Auto-Bulb®.

Available Sizes: 3/16" – 1/2" Materials: Steel, Aluminum, Stainless Steel Headstyles: Protruding, Truss, 100° Flush, 100° Oval Countersunk, Countersunk

*Not applicable to all Huck structural blind fasteners





Related Arconic Fastening Systems and Rings Products

KEYSERT® Solid Inserts

Keysert* solid, one-piece, key-locking inserts are used to repair damaged threads or for use in original equipment. The Keysert* locking keys provide a positive mechanical lock, which prevents rotation due to vibration or torsion. Keyserts are available in carbon or stainless steel, with internal thread diameters ranging from #6 through 1-1/2" and external diameters ranging from 5/16" to 1-7/8".



Recoil® Threaded Inserts

Recoil* threaded inserts deliver positive locking performance and long thread life. Made from 304 Stainless Steel as a standard, Recoil inserts are also available in a wider range of materials including Inconel, 316 Stainless Steel, and Phosphor Bronze. Recoil sizes range from #2 through 1-1/2" (inch series) and M2 through M39 (metric series).



Marson™ Blind Rivets

Proven in a wide range of assembly applications, Marson[™] blind rivets are available in Buttonhead, Large Flange, and Countersunk headstyles in a wide range of materials and sizes ranging from 3/32" to 1/4".



Marson™ Rivet Nuts

Marson" offers a wide selection of rivet nuts that provide permanent thread placement in thin materials while reducing the surface damage that can occur with other fastening methods. These rivet nuts are available in a wide variety of styles, with grip ranges from 0.020" to 0.500".






Huck® Fastening Technology

Vibration Resistance: How Huck® Does It.


Huck® engineering. It's what makes a HuckBolt a HuckBolt. And, it's what gives each C50L® BobTail,® and Huck 360® its strength and vibration-resistant properties – the highest level of vibration resistance you'll find in the industry.


Eliminating the Gap.

In conventional nut and bolt installations, gaps between nut and bolt threads are a source of potential loosening. The HuckBolt design practically eliminates these gaps, by featuring full metal-to-metal contact between the swaged-on collar and the pin. This unique swaged connection provides unwavering vibration resistance, even in the most vibration-intensive environments.

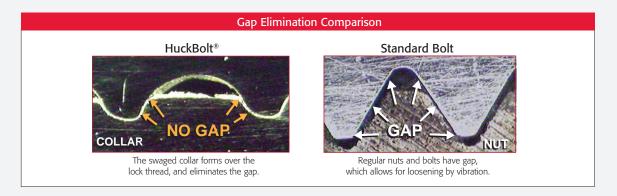

When compared with conventional nuts and bolts, HuckBolts have a much larger cross-sectional area and larger root radius, resulting in a much stronger and more secure joint. In fact, HuckBolts have up to 30% more bolt cross-sectional area, and up to 5x larger root radius than regular bolts, depending on the bolts used.





Huck® vs. Conventional Joining

As compared with conventional torqued-on nuts and bolts and when contrasted with welding, Huck fasteners offer consistent clamp that is designed into the fastener itself – clamp integrity is not dependent on the tool or the operator.

Huck fasteners offer a combination of a reliable, vibration-resistant joint, and a safe, efficient installation process. Even in the most vibration-intensive applications, Huck fasteners are proven to never come loose, and maintain strength and structural integrity for the life of the joint.

Huck® vs. Torque Clamp: The True Measure of Joint Integrity.

Torque has long been the standard by which tightness of a joint was measured. However, clamp has been proven to be the true indicator of whether or not a joint exhibits high strength and long life. Only HuckBolts, which use the direct tension/swaging method of installation, deliver that consistent clamp. To prove it, Huck engineers tested conventional nuts and bolts and established that even when torque is consistent, clamp isn't. The result of that testing is found below.

(6)	
N	
22	70
Ħ	0
긘	=
Ė	=
W	П

5/8" GRADE 8 FASTENER	CLAMP LBF TEST 1	CLAMP LBF TEST 2	CLAMP LBF TEST 3	CLAMP LBF TEST 4	% VARIATION
Free Running Nut	15,000	20,000	21,000	18,000	40%
Nylon Lock Nut	21,500	18,000	18,000	24,000	33%
Stoverized Lock Nut	26,000	21,000	28,500	23,000	36%

*Results based on 5/8" diameter bolt.

Because HuckBolts are not subjected to torsion during installation, they can safely be taken to higher preload values than conventional bolts. This installation requires direct tension only, while conventional bolts are under a combination of tension and torsion during installation.

Conventional bolts develop torsional forces from friction and geometric factors between the mating threads, resulting in a reduction of yield and tensile strength of 10% to 20%.

Huck Vs. Welding HuckBolts Change The Equation.

While welding has long been utilized to deliver a secure joint, there are several strong reasons to consider a proven alternative — direct-tension, swaged-on HuckBolts. Fastening with vibration-resistant HuckBolts instead of welding offers five key benefits over welding: safety, simplicity, speed, cost-savings, and structural integrity. Utilized over more than 60 years in the harsh trucking and rail industry environments, Huck fasteners have proven they perform.







Introducing Howmet Fastening Systems

Howmet Fastening Systems offers the greatest breadth and depth of fastening solutions available including from our standard range: slotted nuts, self-locking nuts, 1/4 turn fasteners, high tensile latches, threaded inserts, lockbolts & structural blind fasteners.

Alternatively, through decades of experience working closely with major manufacturers from a myriad of markets, Howmet can develop specially engineered parts designed to your specific fastening needs.

With manufacturing and distribution facilities on the major continents, Howmet is ideally suited to work with customers on a global basis.

These strengths combined with Howmet's long-standing leadership and commitment to excellence make Howmet Fastening Systems the best choice to answer your fastening system needs.



Contact

Europe

Howmet Fastening Systems Telford Operations, Unit C, Stafford Park 7 Telford TF3 3BQ England

Tel: +44 (0) 1952 290011 Fax: +44 (0) 1952 204670

Howmet Fastening Systems St Cosme Operations, 9 rue de Cressonnieres 72110 Saint Cosme en Varais

Tel: +33 (0) 2.43.31.41.00 Fax: +33 (0) 2.43.31.41.41

Howmet Fastening Systems Kelkheim Operations, Industriestr. 6 65779 Kelkheim Germany

Tel: +49 (o) 6195-805-0 Fax: +49 (o) 6195-2001

Americas

Industrial Fastener Division 8001 Imperial Drive Waco, TX 76712, USA P.O. Box 8117 Waco, TX 76714-8117, USA Tel: 800 388 4825

Installation Tool Division 1 Corporate Drive Kingston, MY 12401, USA Tel: 800 278 4825 Fax: 845 334 7333

Fax: 800 798 4825

Latin American Sales Avendia Parque Lira 79-402 Tacubaya MEXICO C P 11850 Tel: 52 55 5515 1776 Fax: 52 55 5277 7564

China

Howmet Shanghai Office Area A2, 1st Floor, 205 Taigu Road, Waigaoqiao Free Trade Zone Shanghai 200131 China Tel: +86 21 5866 5080 Fax: +86 21-58681859

India

Howmet Fastening Systems-Industrial Products A division of Arconic India Private Limited Level 6, Constantia Office Complex, 11, Dr. U.N. Brahmachari Street, Kolkata - 700017, West Bengal India

Ph: +91 33 4400 0610 -0616 Fax: +91 33 4400 0555

Japan

Howmet Fastening Systems c/o Arconic Japan Ltd. Fuji Bldg #506 Marunouchi 3-2-3 Chiyoda-ku, Tokyo 100-0005 Japan Tel: 81 3 3287 1701 (Reception) 81 3 3287 1902 (Arconic Direct) 81 80 6719 6496 (Cell)

Australia

Howmet Australia PO Box 144, Mt Waverley VIC 3149, AUSTRALIA Tel: 61 3 8545 3350 Fax: 61 3 8545 3390

Star

The UK's largest Huck Distributor

Star Fasteners (UK) Ltd Unit 1, 44 Brookhill Road, Pinxton, Nottinghamshire NG16 6RY United Kingdom.

sales@starfasteners.co.uk | Tel: +44(0)1159324939







TS 515931-000

515931-000

Disclaimer

The information contained in this publication is only for general guidance with regard to properties of the products shown and/or the means for selecting such products, and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only inHowmet's written quotations, acknowledgments, and/or purchase orders. It is recommended that the user secure specific, up-to-date data and information regarding each application and/or use of such products.

